

PRODUCT SUBMITTAL SHEET: WATER HERO P-100 1.5" FLOW MONITOR & AUTOMATIC SHUT-OFF



DESCRIPTION

Water Hero P-100 provides real time water consumption data to a web interface and smartphone. When a leak is detected, users receive a text & email alerts and water is shut-off. It works by reading the rotations of a traditional positive displacement water meter and converts these rotations to digital flow readings.



Leak alerts are sent and automatic shut-off occurs when there is continuous flow for more than a user set amount of time. Water Hero also alerts users when it detects high or low temperatures. Features include:

- Functions like a security system with two modes (home/away) and user configurable text/email alert and automatic shut-off
- Remote water shut-off via smartphone/web interface
- On board temperature sensor
- Rechargeable back-up battery for operation in power outage
- Tracking of historical water consumption

OPERATIONAL REQUIREMENTS

- Broadband 2.4 GHz Wi-Fi connection [unless opting for cellular option]
- Wall power for wall adapter
- Cut into pipe by plumbing contractor

HOW TO PURCHASE OR LEARN MORE

Offered through a contractor or through the Water Hero website. Reach out to us at info@waterhero.com or (877) 662-4496 for pricing information and/or questions

PRODUCT SUBMITTAL SHEET: WATER HERO P-100 1.5" FLOW MONITOR & AUTOMATIC SHUT-OFF



COMPONENTS INCLUDED

The P-100 unit consists of five components and access to our software system. Not shown here but also included is a wall adapter and RJ45 cord



Main Board with Wi-Fi chip and state-of-the-art processor




Water Hero smart electronics, brass water meter and union couplings




Motorized ball valve


WEB APPLICATION SCREENSHOTS

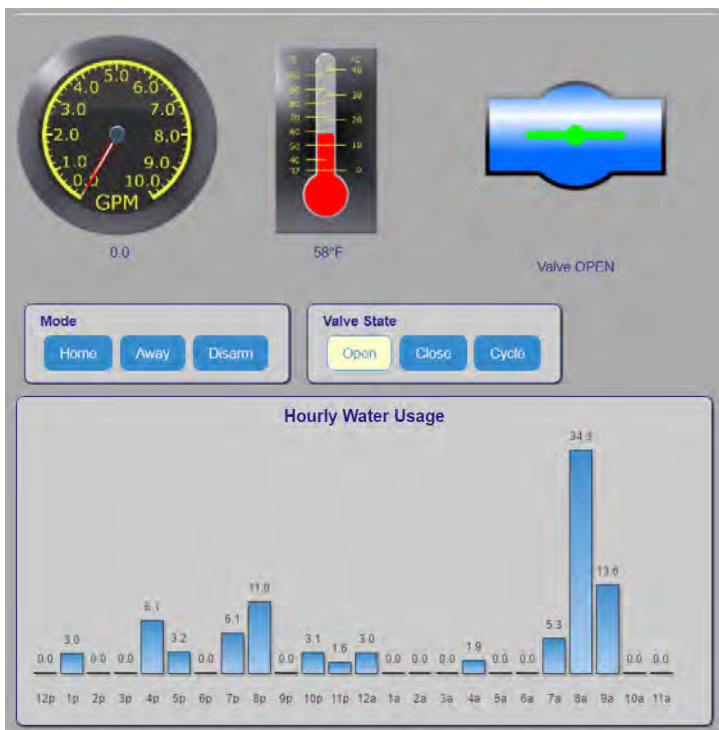

Dashboard

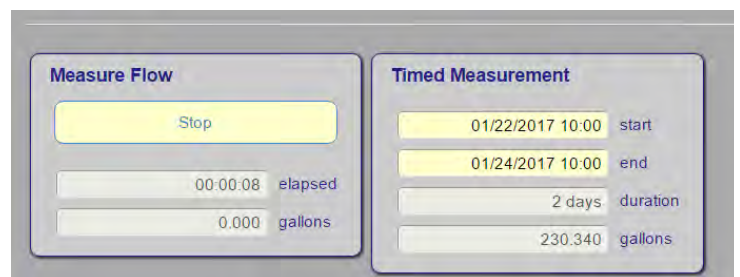

Historical & Measure Flow Functions

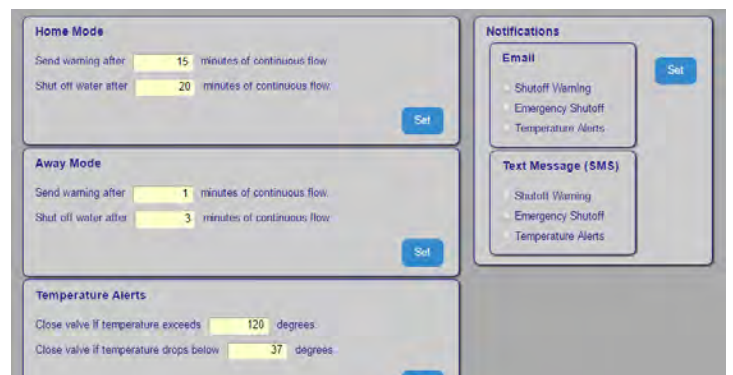

Alert Settings

**PRODUCT SUBMITTAL SHEET:
WATER HERO P-100 1.5" FLOW
MONITOR & AUTOMATIC SHUT-OFF**



IN-LINE COMPONENT SPECIFICATIONS [1.5" METER & VALVE]

STAINLESS STEEL VALVE



- NSF Certified
- Body Material: 316 Stainless Steel
- Stainless Steel Gearing
- Rated for 80,000 turns
- Manual Override
- Valve Inner Diameter: 1.5"
- Max working pressure: 232 PSI
- Dimensions [L x H]: 3.875" x 7.25"

WATER METER



- Utility-Grade AWWA C702 compliant
- NSF/ANSI Standard 372
- Starting/High Flow: .5/100 GPM
- Max Working Pressure: 150 PSI
- Max Temp: 122F
- Accuracy: 97% to 103% within 1.5-100 GPM
- Dimensions [L x W]: 18.13" x 6"

Total Dimension Both = 21.5" Long (including union coupling tail pieces), 9.5" Tall and 6" Wide

INSTALLATION GUIDANCE


Installation typically takes approximately 1 hour and requires the following high level steps:

- Drain water after the point of installation
- Cut ~21.5" section from the pipe where water enters the building
- Assemble and solder necessary fittings, unions, water meter and stainless steel valve into the pipe
- Connect Water Hero with existing WiFi network

**PRODUCT SUBMITTAL SHEET:
WATER HERO P-100 1.5" FLOW
MONITOR & AUTOMATIC SHUT-OFF**




TYPICAL CONFIGURATION*

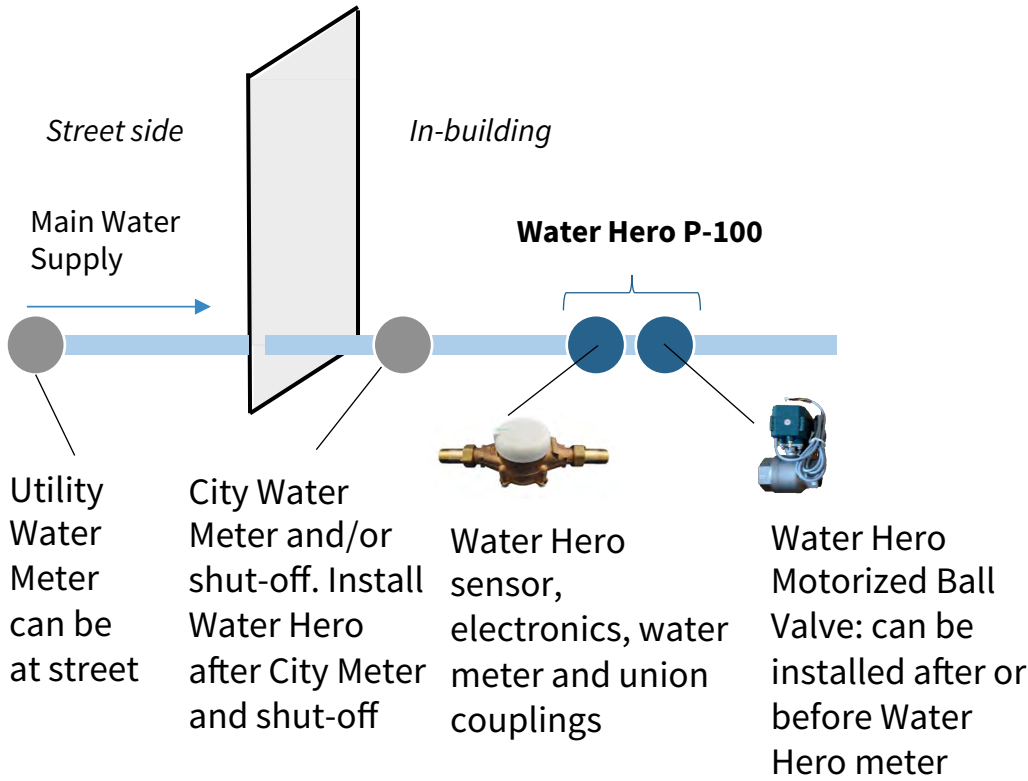

- Must be installed inside, unit not waterproof
- Main Controller must be installed in vicinity of existing power outlet
- Main Controller must be within signal range of building 2.4 GHz WiFi
- Install after Utility Water Meter, typ. where main water supply enters building
- Horizontal or vertical installation



WARNING: Water Hero P-100 must be plumbed after (downstream of) fire suppression systems

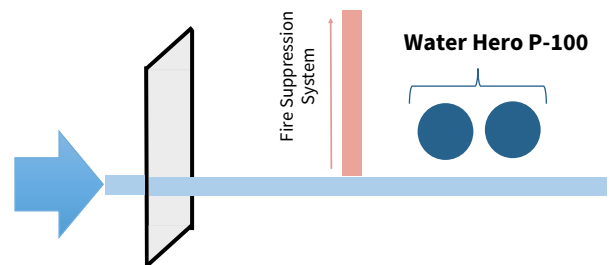

*Installation must comply with federal, local and state building and plumbing codes

SUBMITTAL APPROVALS:

JOB NAME:
CONTRACTOR:

DATE: